

**PSM24A24DAS**

**DC POWER SUPPLY**

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, 24 Vac to 1.5-28 Vdc, 300 mA Adjustable Output



**SPECIFICATIONS**

- Voltage Input:** 24 Vac
- Voltage Output:** 1.5 - 28 Vdc Isolated
- Frequency:** 50/60 Hz
- Overload Protection:** Electrical and Thermal, Auto-Reset
- Operating Temperature:** -30 to 140° F
- Status:** LED On = Activated
- Dimensions:** 1.625" x 2.750" x 4.000"
- Track Mount:** 4.000" and 2.750"  
MT212-4 Mounting Track Supplied
- Weight:** 1.10 lbs.
- ON/OFF Switch:** 2 Position Toggle
- Approvals:** Class II UL Listed, UL916, C-UL, CE

**Output Current Ratings:**

- 116 mA @ 10 Vdc
- 125 mA @ 12 Vdc
- 300 mA @ 24 Vdc

**Input Current Rating:**


950 mA Maximum

**Percent Ripple:**

0.0016%, 24 Vdc @ 300 mA

**Regulation:**

Load: 0.04% No Load to Full Load  
Line: 0.0080 mV/V

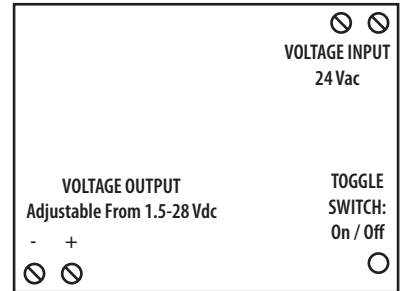

**NOTES**