


**UNINTERRUPTIBLE POWER SUPPLY IN KIT**

**PSH600-UPS-STAT**

Kit Consisting of Enclosed Power Control Center Model PSH2C2RB10 (10 Amp Switch / Circuit Breaker, Two (2) 120 Vac Outlets, Terminals, 120 Vac Input) with a 600VA UPS. (Status Contacts)

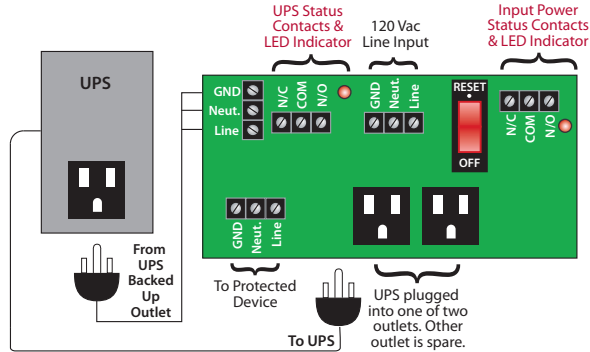

Shown Without Cover



**SPECIFICATIONS**

**UPS**

**UPS:** 550 or 600VA  
**Backup Time:** 2.5 Min. @ Full 600 VA Load  
 10 Min. @ 1/2 Load  
**Power Consumption** Up to 3 Amp @120 Vac  
**Max Load:** 330 Watt  
**Frequency:** 50/60 Hz  
**Temperature Rating of UPS:** 32 to 104° F  
**UPS Transfer Time:** 6ms  
**Approvals:** UL Listed, UL1778

**Line Input Status Contacts and UPS Output Status Contacts Rated:**

10 Amp @ 277 Vac General Use  
 10 Amp @ 30 Vdc (N/O)  
 7 Amp @ 30 Vdc (N/C)  
 1/2 HP @ 125 Vac  
 1/4 HP @ 277 Vac  
 1000 VA @ 120 Vac Magnetic Ballast (N/C)  
 C300 Pilot Duty  
 16.8 VA @ 24 Vac Pilot Duty


**Notes:**

- To order without UPS, so that any other commercial UPS with appropriate ratings and within housing space limitations may be used, see model PSH2C2RB10.
- To order interface board for replacement or for separate use, order model PSMN2C2RB10.
- **Average battery life: 3-5 years depending on the number of discharge cycles and environmental temperature**
- UPS may change based on quality and availability

**PSH2C2RB10**

**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
**Approvals:** UL Listed, UL916, C-UL, CE, RoHS  
**Dimensions:** 12.000" x 16.000" x 6.000"  
 Metal Housing with Screw Cover  
**Weight:** 14.3 lbs.

**ESTIMATED BACKUP TIME VS. LOAD**

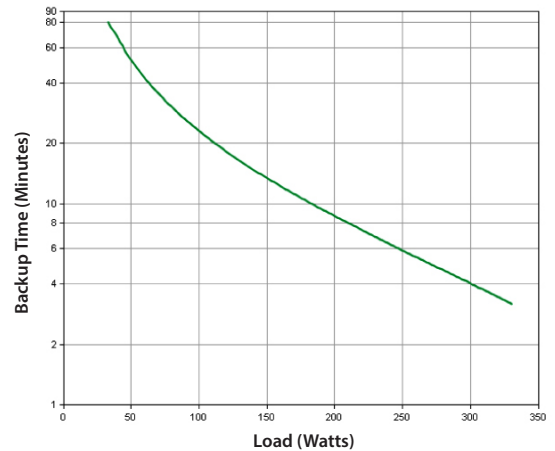

**Input Power Status Contacts and LED Indicator**

The input power status contacts and LED indicate the presence of normal power. When normal power is present, the relay is energized, and the LED is on. When normal power is lost, the relay is de-energized, and the LED is off.

**UPS Status Contacts and LED Indicator**

The UPS status contacts and LED indicate power from the UPS. When normal power is present, the relay is energized, and the LED is on. When normal power is lost, the relay will be energized as long as the UPS can sustain it (until the UPS battery is depleted), and the LED is on.