



AC POWER SUPPLY

PSH75A Series

Enclosed Single 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac



* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.

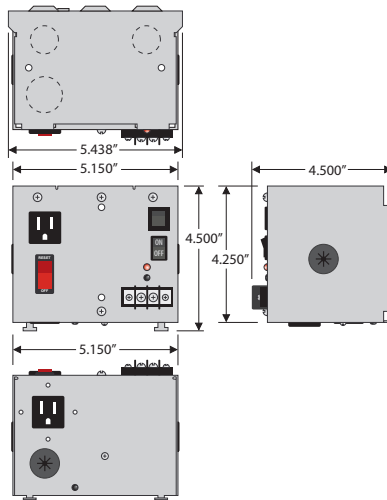

PSH75A SERIES SELECTION GUIDE				
Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A	.	.	.	External Terminal Strip
PSH75AW	.	.	.	Internal Wires
PSH75AB10*	.	.	10 Amp Switch / Breaker	External Terminal Strip
PSH75AWB10*	.	.	10 Amp Switch / Breaker	Internal Wires

SPECIFICATIONS

- Transformer:** One 75 VA Split-Bobbin
- Over Current Protection:** Circuit Breaker
- Frequency:** 50/60 Hz
- 24 Vac ON/OFF:** On / Off Switch & Breaker
- Main Breaker ON/OFF:** Switch / Breaker (10 Amp) (Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
- Approvals:** Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS, Special
 ^ Seismic Certification of Equipment and Components: OSP-0201-10
- Dimensions:** 4.500" x 5.438" x 4.500"

- Input Wires:** "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
- Output Wires:** "B10" Models Only
Auxiliary Output
 BLU: 120 Vac
- All Other Models Primary Wires****
 GRY: 480 Vac
 BRN: 277 Vac
 ORG: 240 Vac
 RED: 208 Vac
 WHT: 120 Vac
 BLK: Common
- "W" Models Only Transformer Output**
 WHT/YEL: 24 Vac
 WHT/BLU: Common

- Notes:**
- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
 - Design is in accordance with ASCE 7-05 Chapter 13: ^
www.oshpd.ca.gov/FDD/Pre-Approval/OSP-0201-10.pdf
 - All primary voltages other than 120 Vac will result in the disabling of convenience outlets.**