


PSH75A Series

Enclosed Single 75 VA Power Supplies, 480/277/240/208/120 to 24 Vac

AC Power Supply

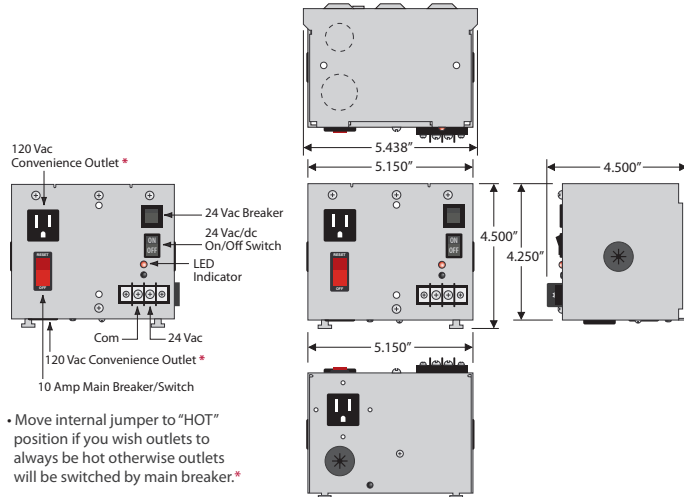

• Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.*



Model #	120 Vac Outlets	Aux Output Wire	Main Breaker on Input Power	Secondary Configuration
PSH75A	•			External Terminal Strip
PSH75AN				External Terminal Strip
PSH75ANW				Internal Wires
PSH75AW	•			Internal Wires
PSH75AB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANB10**	•	•	10 Amp Switch / Breaker	External Terminal Strip
PSH75ANWB10**	•	•	10 Amp Switch / Breaker	Internal Wires
PSH75AWB10**	•	•	10 Amp Switch / Breaker	Internal Wires

Specifications

Transformer: One 75 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)**
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Dimensions: 4.500" x 5.438" x 4.500"
Weight: 4.500 lbs.

Input Wires: "B10" Models Only
Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground

Output Wires: "B10" Models Only
Auxiliary Output
 BLU: 120 Vac

All Other Models
Primary Wires
 GRY: 480 Vac
 BRN: 277 Vac
 ORG: 240 Vac
 RED: 208 Vac
 WHT: 120 Vac
 BLK: Common

"W" Models Only
Transformer Output
 WHT/YEL: 24 Vac
 WHT/BLU: Common

Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- **To order UL508, add "-IC" to end of model number.**