



### PSM24A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **24 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

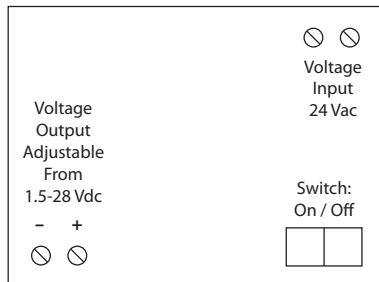

### PSM19A24DAS

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, **120 Vac** to 1.5-28 Vdc, 300 mA Adjustable Output

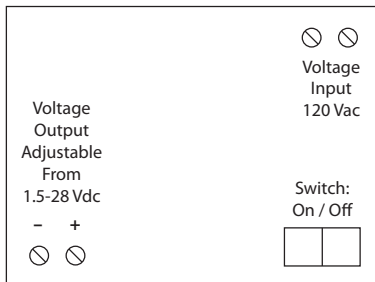

### DC Power Supply



### Specifications

**Voltage Input:** 24 Vac  
**Voltage Output:** 1.5 - 28 Vdc Isolated  
**Frequency:** 50/60 Hz  
**Overload Protection:** Electrical and Thermal, Auto-Reset  
**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Status:** LED On = Activated  
**Dimensions:** 1.625" x 2.750" x 4.000"  
**Track Mount:** 4.000" and 2.750"  
 MT212-4 Mounting Track Supplied  
**Weight:** 1.10 lbs.  
**ON/OFF Switch:** 2 Position  
**Approvals:** Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS

**Output Current Ratings:**  
 116 mA @ 10 Vdc  
 125 mA @ 12 Vdc  
 300 mA @ 24 Vdc

**Input Current Rating:**  
 950 mA Maximum (PSM24A24DAS)  
 150 mA Maximum (PSM19A24DAS)

**Percent Ripple:**  
 0.0016%, 24 Vdc @ 300 mA

**Regulation:**  
 Load: 0.04% No Load to Full Load  
 Line: 0.0080 mV/V (PSM24A24DAS)  
 Line: 0.6250 mV/V (PSM19A24DAS)