



RIBMXF

4.00" Track Mount Internal **Fixed**
.50-20 Amp AC Sensor

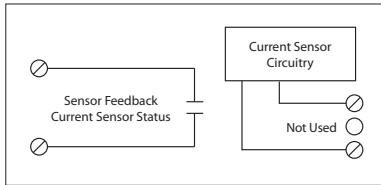


RIBMXA

4.00" Track Mount Internal **Adjustable**
.50-20 Amp AC Sensor

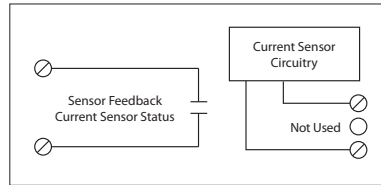

AC Sensors



Specifications

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 1.700" x 4.000" x 1.250"
Track Mount: 4.000"; See MT4 Series on page 134
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL
 California State Fire Marshal, CE, RoHS

Sensor Type: Internal, with contact status
Sensor Threshold: Fixed, .5 Amps (RIBMXF)
 Adjustable, .50-20 Amps (RIBMXA)
Sensor Range: .50-20 Amps
Sensor Output: Solid State Contact 30 Vac/dc, 0.4 Amp
Max Sense Voltage: 300 Vac

Sensor Output:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp