



**RIBMXRF**

4.00" Track Mount Solid Ring Remote **Fixed**  
3-150 Amp AC Sensor

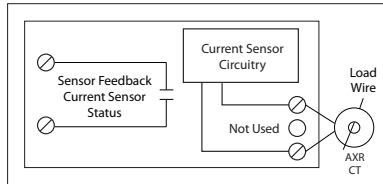

**RIBMXRA**

4.00" Track Mount Solid Ring Remote **Adjustable**  
3-150 Amp AC Sensor

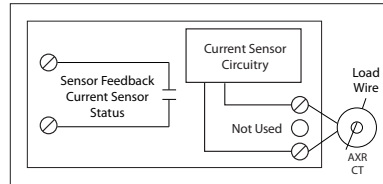

**AC Sensors**



**Specifications**

**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Dimensions:** 1.700" x 4.000" x 1.250"  
**Track Mount:** 4.000", See MT4 Series on page 134  
**MT4 Mounting Track Sold Separately**  
**Wire Length:** 16", 600V Rated  
**Approvals:** UL Listed, UL916, UL864, C-UL  
 California State Fire Marshal, CE, RoHS

**Sensor Type:** External, with contact status  
**Inside Diameter:** .75"  
**Outside Diameter:** 2.28"  
**Sensor Threshold:** Fixed, 3 Amps (RIBMXFR)  
 Adjustable, 3-150 Amps (RIBMXRA)  
**Sensor Range:** 3-150 Amps  
**Sensor Output:** Solid State Contact 30 Vac/dc, 0.4 Amp  
**Max Sense Voltage:** 600 Vac

**Sensor Output:**

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp