



RIBXF

Enclosed Internal **Fixed** 0.50-30 Amp AC Sensor

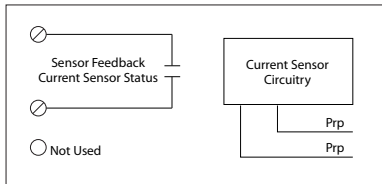

RIBXA

Enclosed Internal **Adjustable** 0.50-30 Amp AC Sensor

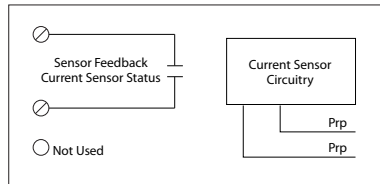

AC Sensors



Specifications

Operating Temperature: -30 to 140° F

Humidity Range: 5 to 95% (noncondensing)

Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple

Wire Length: 16", 600V Rated

Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS

Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: Internal, with contact status

Sensor Threshold: Fixed, .5 Amps (RIBXF)

Adjustable, .50-30 Amps (RIBXA)

Sensor Range: .50-30 Amps

Sensor Output: Solid State Contact 30 Vac/dc, 0.4 Amp

Max Sense Voltage: 600 Vac

Sensor Output:

- Solid State Contact
- 30 Vac/dc, .4 Amp Max.
- When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
- When current sensor status is on (closed), voltage drop <.3 Vac/dc @ .1 Amp <1.6 Vac/dc @ .4 Amp