



RIBXJF

Enclosed Split Ring Remote **Fixed**
3-150 Amp AC Sensor

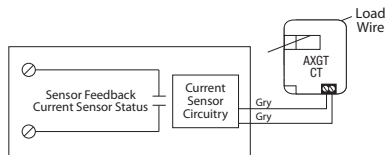

RIBXJA

Enclosed Split Ring Remote **Adjustable**
3-150 Amp AC Sensor

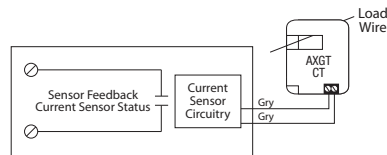

AC Sensors



Specifications

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 4.00" x 4.00" x 1.80" with .50" NPT Nipple
- Remote Dimensions:** (Outside) 2.52" x 2.00", (Inside) .52" x .52"
- Wire Length:** 16", 600V Rated
- Approvals:** UL Listed, UL916, UL864, C-UL
California State Fire Marshal, CE, RoHS
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1

- Sensor Type:** External, with contact status
- Sensor Threshold:** Fixed, 3 Amps (RIBXJF).
Adjustable, 3-150 Amps (RIBXJA)
- Sensor Range:** 3-150 Amps
- Sensor Output:** Solid State Contact 30 Vac/dc, 0.4 Amp
- Max Sense Voltage:** 600 Vac

- Sensor Output:**
- Solid State Contact
 - 30 Vac/dc, .4 Amp Max.
 - When current sensor status is off (open), leakage <30 uA @ 30Vac/dc
 - When current sensor status is on (closed), voltage drop <.3 Vac/dc @ .1 Amp
< 1.6 Vac/dc @ .4 Amp