

Tightening Torque 5in-lbs.

Contact Ratings:

10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc N/O
7 Amp Resistive @ 30 Vdc N/C
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Coil Current (RIBAN24C):

26 mA @ 20 Vac
31 mA @ 24 Vac
14 mA @ 20 Vdc
18 mA @ 24 Vdc
28 mA @ 35 Vdc


Coil Current (RIBAN12C):

53 mA @ 10 Vac
62 mA @ 12 Vac
29 mA @ 11 Vdc
35 mA @ 12 Vdc

Mounting:

- A:** 2.750" Track Mount, See MT212 Series data sheet.
MT212 Mounting Track Sold Separately.
- B:** 35mm x 7.5mm symmetrical DIN rail EN50022
- C:** Screw Mount, See DS80625 data sheet.
DS80625 Self-Tapping Drill Screws Sold Separately.
- D:** Current Sensor Mount, See RIBXG Series or RIBXK Series data sheets.
Current Sensors Sold Separately.

See Mounting Options on Other Side.

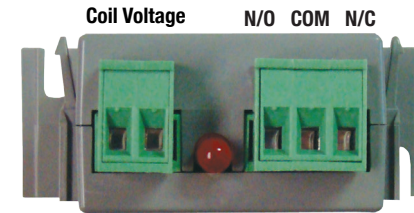

Tightening Torque 5in-lbs.

Contact Ratings:

10 Amp General Use @ 277 Vac
10 Amp Resistive @ 30 Vdc N/O
7 Amp Resistive @ 30 Vdc N/C
1/2 HP @ 125 Vac
1 HP @ 250 Vac
1/4 HP @ 277 Vac
C300 Pilot Duty

Coil Current (RIBAN24C):

26 mA @ 20 Vac
31 mA @ 24 Vac
14 mA @ 20 Vdc
18 mA @ 24 Vdc
28 mA @ 35 Vdc

Coil Current (RIBAN12C):

53 mA @ 10 Vac
62 mA @ 12 Vac
29 mA @ 11 Vdc
35 mA @ 12 Vdc

Mounting:

- A:** 2.750" Track Mount, See MT212 Series data sheet.
MT212 Mounting Track Sold Separately.
- B:** 35mm x 7.5mm symmetrical DIN rail EN50022
- C:** Screw Mount, See DS80625 data sheet.
DS80625 Self-Tapping Drill Screws Sold Separately.
- D:** Current Sensor Mount, See RIBXG Series or RIBXK Series data sheets.
Current Sensors Sold Separately.

See Mounting Options on Other Side.