RIBMX24BF
LED ON = RELAY ACTIVATED

Bulletin B514 • 393008E

Functional Devices, Inc.
101 Commerce Drive
Sharpsville, IN 46068
Phone: (765)883-5538 Fax: (765)883-7505
www.functionaldevices.com

CONTACT RATINGS
20A Res. @ 277 Vac
20A Ball. @ 120/277Vac (N/O)
10A Ball. @ 277Vac (N/C)
16A Elect. Ball. @ 277Vac (N/O)
10A Tung. @120Vac (N/O)
2A Tung. @ 120Vac (N/C)
1 HP @ 120 Vac
2 HP @ 277 Vac
770 VA Pilot @ 120 Vac
1110 VA Pilot @ 277 Vac

COIL INPUT
47 mA @ 30 Vdc
83 mA @ 24 Vac

SENSOR RANGE
0.5-20A,
Maximum 20A

c UL us
LISTED
13CY
15M6

TYPE F, G, EM
For use with
Smoke Control System
General Signaling
Equip. NM
Dry Indoor Use

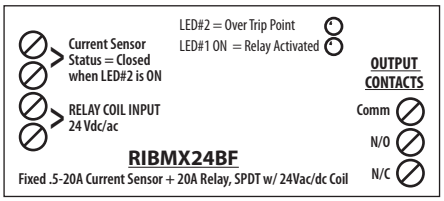

CAUTION: RISK OF ELECTRIC SHOCK - MORE THAN ONE DISCONNECT MAY BE REQUIRED TO DEENERGIZE THE DEVICE BEFORE SERVICING.

RIBMX24BF
LED ON = RELAY ACTIVATED

Bulletin B514 • 393008E

Functional Devices, Inc.
101 Commerce Drive
Sharpsville, IN 46068
Phone: (765)883-5538 Fax: (765)883-7505
www.functionaldevices.com

CONTACT RATINGS
20A Res. @ 277 Vac
20A Ball. @ 120/277Vac (N/O)
10A Ball. @ 277Vac (N/C)
16A Elect. Ball. @ 277Vac (N/O)
10A Tung. @120Vac (N/O)
2A Tung. @ 120Vac (N/C)
1 HP @ 120 Vac
2 HP @ 277 Vac
770 VA Pilot @ 120 Vac
1110 VA Pilot @ 277 Vac

COIL INPUT
47 mA @ 30 Vdc
83 mA @ 24 Vac

SENSOR RANGE
0.5-20A,
Maximum 20A

c UL us
LISTED
13CY
15M6

TYPE F, G, EM
For use with
Smoke Control System
General Signaling
Equip. NM
Dry Indoor Use

CAUTION: RISK OF ELECTRIC SHOCK - MORE THAN ONE DISCONNECT MAY BE REQUIRED TO DEENERGIZE THE DEVICE BEFORE SERVICING.