


PREPACKAGED SWITCHES


SIB02S

Enclosed Switch 20 Amp, 3 Position Maintained, On/Off/On

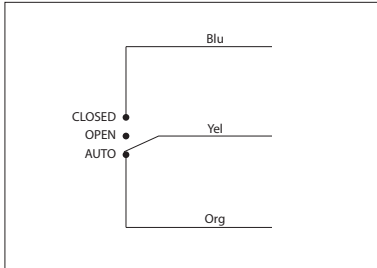


SIB04S

Enclosed Switch 20 Amp, 2 Position Maintained, On/On, 3 Wires

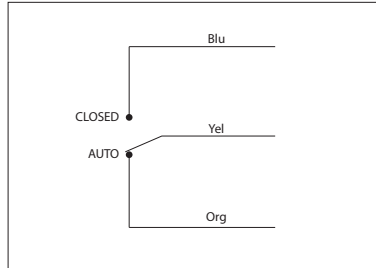



SIB05S

Enclosed Switch 20 Amp, 2 Position Maintained, On/Off, 2 Wires

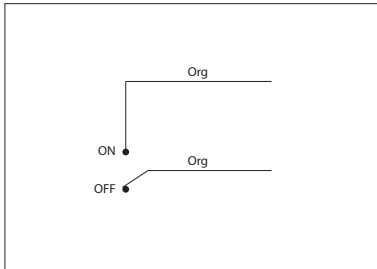

SIBLS

Enclosed Switch 5 Amp, 30 Vac/dc, 3 Position Maintained, On/Off/On with LED Indicator

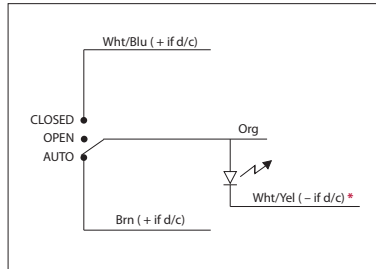

- SIB02S-RD
- SIB04S-RD
- SIB05S-RD
- SIBLS-RD
- Red housing

SPECIFICATIONS

- Operating Temperature:** -30 to 140° F
- Humidity Range:** 5 to 95% (noncondensing)
- Dimensions:** 1.700" x 2.800" x 1.500" (w/ .500" NPT Nipple)
- Wires:** 16", 600V Rated
- Approvals:** UL Listed, UL916, C-UL
- Housing Rating:** UL Accepted for Use in Plenum, NEMA 1

- SIB02S, SIB04S, RIB05S**
- Switch Ratings:**
- 20 Amp Resistive @ 277 Vac
 - 1110 VA Pilot Duty @ 277 Vac
 - 770 VA Pilot Duty @ 120 Vac
 - 20 Amp Ballast @ 277 Vac
 - 10 Amp Tungsten @ 120 Vac
 - 2 HP @ 277 Vac
 - 1 HP @ 120 Vac

- SIBLS Switch Ratings:**
- 5 Amp @ 30 Vac/dc

- Notes:**
- Switch position label can be custom printed according to your needs, simply consult factory
 - Connection to Wht/Yel may be omitted if LED is not needed (SIBLS) *

POWER CONTROL