


AC POWER SUPPLIES

MHP3903100A100AB10


Dual 100 VA Power Supplies, Polymetal Subpanel Mounted, 12.5" x 24.5" x 6.5" Metal Enclosure

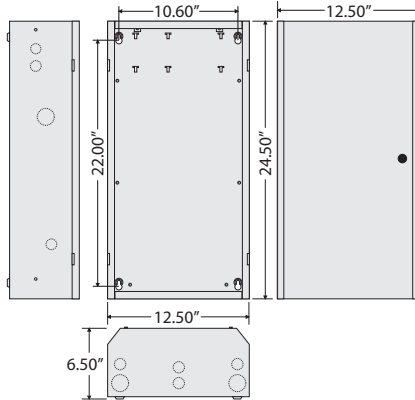

(PS100A100AB10)

MHP3904100A100AB10

Dual 100 VA Power Supplies, Perforated Steel Subpanel Mounted, 12.5" x 24.5" x 6.5" Metal Enclosure

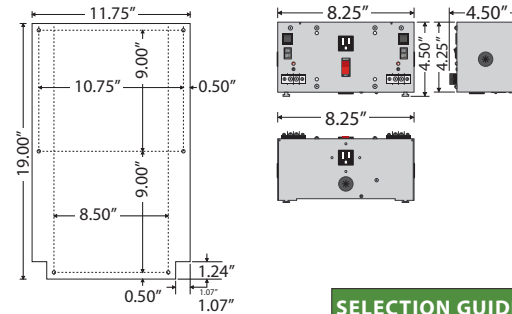

SELECTION GUIDE

Model #	Sub-Panel
MHP3903100A100AB10	Polymetal
MHP3904100A100AB10	Perforated Steel

Transformer: Two 100 VA Split-Bobbin
Over Current Protection: Circuit Breaker
Frequency: 50/60 Hz
24 Vac ON/OFF: On / Off Switch & Breaker
Main Breaker ON/OFF: Switch / Breaker (10 Amp)
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)
Approvals: Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS
Dimensions: 4.500" H x 8.625" W x 4.500" D
Origin: Made of US and non-US parts

Input Wires: Input Power Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Outlet Wires
 BLK: 120 Vac
 WHT: Neutral
 GRN: Ground
Output Wires: Auxiliary Output
 BLU: 120 Vac

Notes:
 • Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
 • Design is in accordance with ASCE 7-05 Chapter 13

METAL HOUSING

Construction: 14 Gauge Steel
Cover Type: Reversible Hook Hinge Key Latch Door
Approvals: UL Listed, C-UL, CE Approved, RoHS
Dimensions: 12.50" (W) x 24.50" (H) x 6.50" (D)

POLYMETAL SUB-PANEL (SP3803S)

Mounting Area: 220.60" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"

PERFORATED STEEL SUB-PANEL (SP3804S)

Mounting Area: 220.60" square
Approvals: Plenum Rated
Dimensions: 19.00" x 11.75"