


## AC POWER SUPPLIES


### MHP3903100AB10

Single 100 VA Power Supply, Polymetal Subpanel Mounted, 12.5" x 24.5" x 6.5" Metal Enclosure

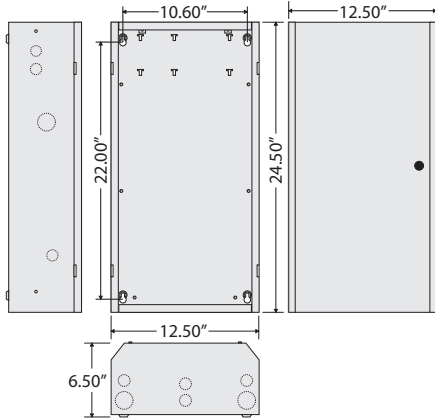

### MHP3904100AB10

Single 100 VA Power Supply, Perforated Steel Subpanel Mounted, 12.5" x 24.5" x 6.5" Metal Enclosure

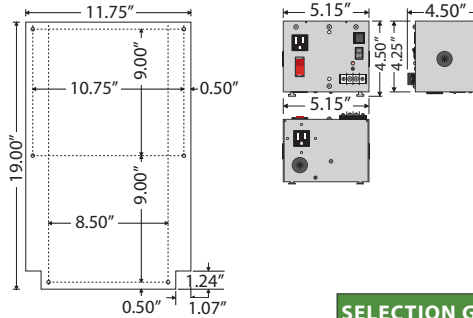

#### SELECTION GUIDE

Model #	Sub-Panel
MHP3903100AB10	Polymetal
MHP3904100AB10	Perforated Steel

#### POWER SUPPLY (PS100AB10)

**Transformer:** One 100 VA Split-Bobbin  
**Over Current Protection:** Circuit Breaker  
**Frequency:** 50/60 Hz  
**24 Vac ON/OFF:** On / Off Switch & Breaker  
**Main Breaker ON/OFF:** Switch / Breaker (10 Amp)  
 (Kills power to entire unit: Outlets, Aux. Output, & Transformer)  
**Approvals:** Class 2 (UL Approved UL5085-3), UL916, C-UL, CE, RoHS  
**Dimensions:** 4.500" H x 8.625" W x 4.500" D  
**Origin:** Made of US and non-US parts

**Input Wires:** Input Power Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground  
Outlet Wires  
 BLK: 120 Vac  
 WHT: Neutral  
 GRN: Ground  
**Output Wires:** Auxiliary Output  
 BLU: 120 Vac

#### Notes:

- Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.
- Design is in accordance with ASCE 7-05 Chapter 13

#### METAL HOUSING

**Construction:** 14 Gauge Steel  
**Cover Type:** Reversible Hook Hinge Key Latch Door  
**Approvals:** UL Listed, C-UL, CE Approved, RoHS  
**Dimensions:** 12.50" (W) x 24.50" (H) x 6.50" (D)

#### POLYMETAL SUB-PANEL (SP3803S)

**Mounting Area:** 220.60" square  
**Approvals:** Plenum Rated  
**Dimensions:** 19.00" x 11.75"

#### PERFORATED STEEL SUB-PANEL (SP3804S)

**Mounting Area:** 220.60" square  
**Approvals:** Plenum Rated  
**Dimensions:** 19.00" x 11.75"