


AC POWER SUPPLIES

PSH40AB10-EXT2

Single 40 VA Power Supply, 120 Vac to 24 Vac, UL Class 2, 10 Amp Main Breaker with Extension Cord, Metal Enclosure

PSH100AB10-EXT2

Single 100 VA, 120 Vac to 24 Vac, UL Class 2, 10 Amp main breaker with input extension cord, Metal Enclosure

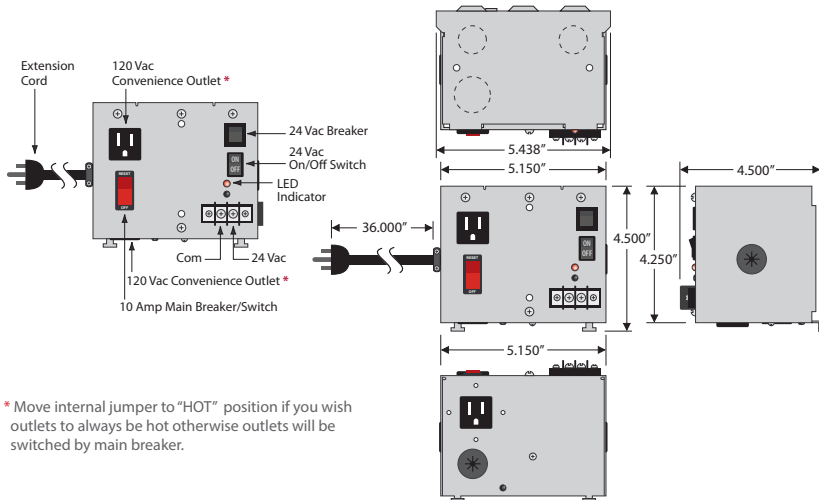

* Move internal jumper to "HOT" position if you wish outlets to always be hot otherwise outlets will be switched by main breaker.



PLUGS DIRECTLY INTO WIRED OUTLET BOX FOR USE ABOVE FALSE CEILINGS OR IN CONTROL PANELS

SPECIFICATIONS

- Transformer:** One 40 VA (PSH40A10-EXT2)
One 100 VA (PSH100A10-EXT2)
- Over Current Protection:** Circuit Breaker
- Frequency:** 50/60 Hz
- 24 Vac ON/OFF:** On / Off Switch & Breaker
- Main Breaker ON/OFF:** Switch / Breaker (10 Amp)
(Kills power to entire unit: Outlets, Aux. Output, & Transformer)*
Total Combined Output 9A
- Max. Ambient Temperature:** 40° C
- Approvals:** Class 2 (UL Approved UL5085-3),
UL916, C-UL, CE, RoHS
- Dimensions:** 4.500"H x 5.438"W x 4.500"D
- Origin:** Made of US and non-US parts

- Input Wires:** Powercord
BLK: 120 Vac
WHT: Neutral
GRN: Ground

- Output Wire:** Auxiliary Load Output
BLU: 120 Vac
9 Amp, max.

- Notes:**
 - Output derating may exceed 20% due to elevated ambient temperature or heat buildup in device over time.