


AC TRANSDUCER

RIBXV

Current Transducer, 0-30 Amp, Analog, 0-5 Vdc/0-10 Vdc Output, NEMA 1 Housing

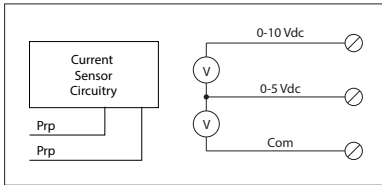

SPECIFICATIONS

Operating Temperature: -30 to 140° F
Humidity Range: 5 to 95% (noncondensing)
Dimensions: 4.00”H x 4.00”W x 1.81”D with 0.50” NPT nipple
Housing Detail: See **Housing C** in housing guide for dimensions
Origin: Made of US and non-US parts
Wire Length: 16”, 600V Rated
Approvals: UL Listed, UL916, C-UL, CE, RoHS
Housing Rating: UL Accepted for Use in Plenum, NEMA 1

Sensor Type: Internal, with voltage output
Sensor Range: 0-30 Amps
Max Sense Voltage: 600 Vac

Sensor Output:

- Voltage output is proportional to current sensor range.
- Min. Input Impedance = 30K ohms
- Accuracy +/- 3% full scale
- Vripple < 10m Vac