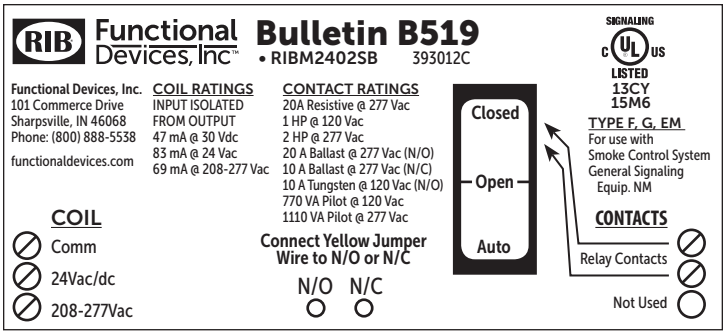
RIB Functional Devices, Inc
Bulletin B519
• RIBM2402SB 393012C
Functional Devices, Inc.
101 Commerce Drive
Sharpsville, IN 46068
Phone: (800) 888-5538
functionaldevices.com
COIL RATINGS
INPUT ISOLATED
FROM OUTPUT
47 mA @ 30 Vdc
83 mA @ 24 Vac
69 mA @ 208-277 Vac
CONTACT RATINGS
20A Resistive @ 277 Vac
1 HP @ 120 Vac
2 HP @ 277 Vac
20 A Ballast @ 277 Vac (N/O)
10 A Ballast @ 277 Vac (N/C)
10 A Tungsten @ 120 Vac (N/O)
770 VA Pilot @ 120 Vac
1110 VA Pilot @ 277 Vac
Closed
Open
Auto
SIGNALING
c UL us
LISTED
13CY
15M6
TYPE F, G, EM
For use with
Smoke Control System
General Signaling
Equip. NM
COIL
Comm
24Vac/dc
208-277Vac
Connect Yellow Jumper
Wire to N/O or N/C
N/O N/C
CONTACTS
Relay Contacts
Not Used